

# Speed Queen®

## Multi-Housing

## Micro-Display Control

STEY77 (elec)


STGY79 (gas)



## Commercial Heavy-Duty Stack Washer/Dryer

### Description

- Ultra high efficient with high speed extract and low water consumption - only 12.8 gallons
- Attractive control panel
- Two separate controls allow washer and dryer to operate independently
- Multi-cycle and temperature controls offers choice of four washer and four dryer cycles
- Dryer airflow one of industry's highest at 220 cfm
- Can be installed on any floor type at any level
- Unit is factory assembled top and lower unit
- Micro-Display CARD operated control
  - Vend price programmable
  - Time countdown
  - Non-resettable cycle counter
- Touch pad control
  - Sound annunciator
- **Activation - Card Ready**

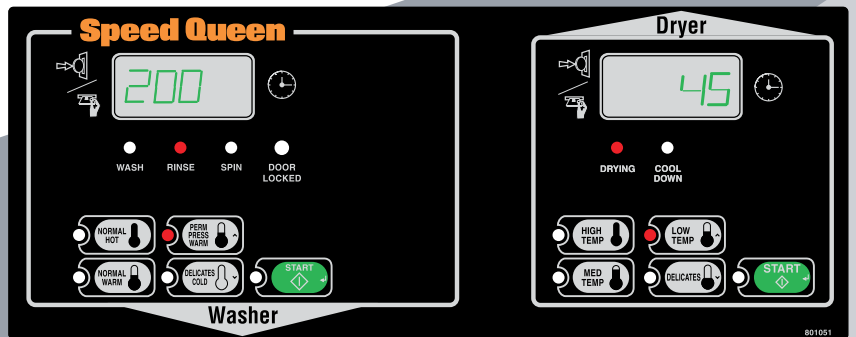

### Nobody Compares with Speed Queen Quality

- Multi-compartment supply dispenser. Automatically adds detergent, liquid bleach and liquid softener.
- High speed extract. 1000 RPM final spin extract maximizes water removal from clothes for faster drying.
- Stainless steel washtub.
  - Full length stainless steel baffles maximize clothes turn for better washing.
- Includes mini guard perforated holes for expedient wash and drain operation.
- Shipped as one unit.



- Large "big load" 15½" door opening with see thru glass.
  - Heavy-duty 10" piano hinge door.
  - Door swing 180°.
- Americans with Disabilities Act (ADA) compliant with side reach exception for 36" over obstruction cabinet top.
- Department of Energy compliant for energy and water standards.
- ENERGY STAR® qualified.
- CEE Tier 3 rated.
  - Modified Energy Factor (MEF) 2.24
  - Water Factor (WF) 4.5



Commercial Built to Last Longer

# Specifications

|                            |                                 |
|----------------------------|---------------------------------|
| Model                      | STEY77 (elec)<br>STGY79 (gas)   |
| Width - in (mm)            | 26 7/8" (683)                   |
| Depth - in (mm)            | 28" (711)                       |
| Height - in (mm)           | 76 5/8" (1946)                  |
| Net Weight - lbs (kg)      | Gas 365 (166)<br>Elec 360 (163) |
| Shipping Weight - lbs (kg) | Gas 395 (179)<br>Elec 390 (177) |
| Code Standard              | Gas CSA Star<br>Elec cULus      |
| Color                      | White                           |


|                                    |  |
|------------------------------------|--|
| <b>WASHER</b>                      |  |
| Cycles                             | Normal/Hot, Normal/Warm, Perm Press/Warm, Delicates/Cold                                       |
| Water Temperature                  | Hot, Warm, Cold  |
| Wash / Tumble - RPM                | 41, 50   |
| Distribution / Pump - RPM          | 90   |
| Spin Speeds - RPM                  | 500, 650, 1000   |
| Motor - HP                         | Variable Speed Induction I   |
| Water Pressure - psi (bar)         | Fill 20 - 120 (1.4 - 8.3)  |
| Electrical Specifications          | 120/60/1 - 15 amp  |
| <b>DRYER</b>                       |  |
| Cylinder Volume - cu. ft. (liters) | 7.0 (198)  |
| Four Temperatures                  | High, Medium, Low, Delicate  |
| Energy Input                       | Gas 22,500 BTU<br>Elec 240/60/1 - 5350 Watts<br>220/60/1 - 5000 Watts<br>230/50/1 - 4800 Watts |
| Electrical Specifications          | Gas 120/60/1 - 15 amp<br>Elec 120/240/60/1 - 30 amp<br>120/208/60/1 - 30 amp                   |

At Speed Queen, we're so confident that our heavy-duty commercial washers and dryers are Commercial Built to Last Longer, that we're offering the following limited warranty to prove it:

Through three years† — Any part of the washer, dryer or stack dryer. Through five years† — The washer transmission assembly, base and cabinet assembly including top, lid and door, against rust from inside out. Lifetime† — The stainless steel washtub.

†Parts only. Labor not included. See Speed Queen Warranty Bond for specifics.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2000.

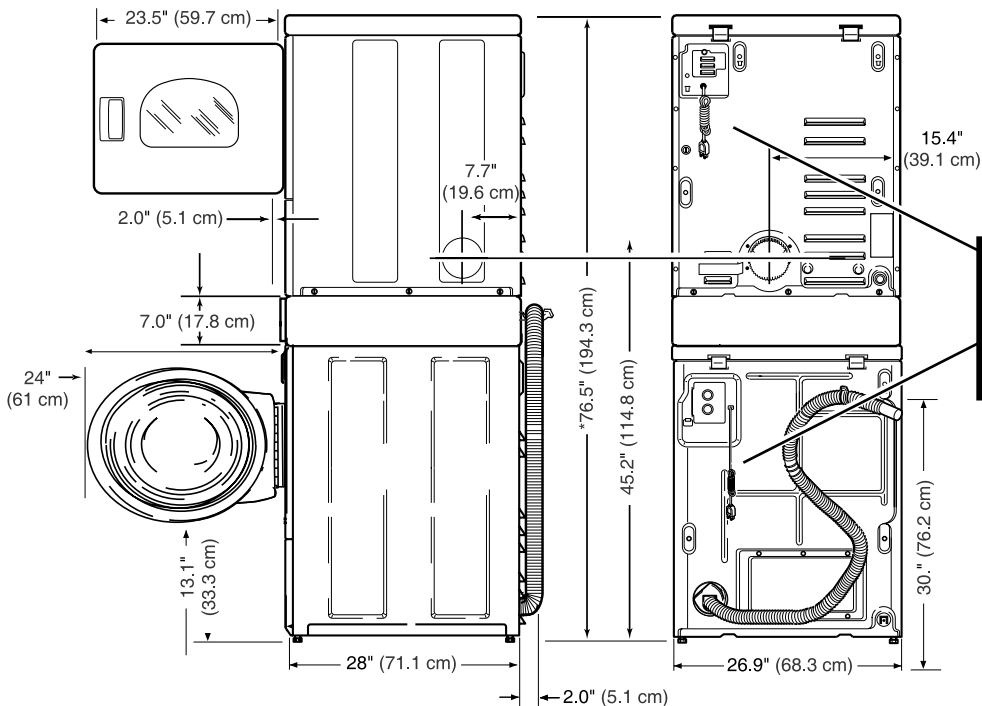

| Temperature Selection |         |
|-----------------------|---------|
| Temperature           | Setting |
| Delicate              | 115°    |
| Low                   | 145°    |
| Medium                | 155°    |
| High                  | 160°    |

**NOTE: TWO SEPARATE POWER CORDS**  
 ✓ ONE FOR DRYER  
 ✓ ONE FOR WASHER